



Solid-state relays SIGMASWITCH®

Content

Solid state relays

Description, certificates, approvals	163
Ordering details	164
Technical data R111, R12x	167
Technical data R100	168
Technical data HDS R2	169
Selection table for heat sinks	170
Examples of applications	171
Dimensional drawings	172

Description

Type series R100

General features

- Complete, compact design
- Mounting on 35 mm DIN rail or screw-mounting on panel
- Current range 20A, 30A and 45A (thyristors)
- Cage terminal with incorporated shock protection (touch proof)
- Zero voltage or instantaneous tripping
- LED display of the input status
- **Integrated heat sink, ready for use**

Application

- Solid state switching of resistive and inductive AC and 3-phase loads

AC 1: resistive load
AC 3: motor load

Certifications and Approvals

R100
R111 / R115 / R112
R12x
R311 / R315
HS / HDS
HDS-R2/HDWS

Type series 111 / 311

General features

- Load side:
Single-phase devices: Thyristors for AC1 and AC3 up to 690VAC and 100A
3-phase devices:
alternistors for AC 1 and AC3 up to 530VAC and 55A, with internal RC-circuit
- Electrical isolation by means of an optocoupler between control circuit and load circuit
- Zero voltage switching, radio interference suppressed
- Screw mounting, snap on mounting with adapter for 35 mm top-hat rail to EN DIN 50 022
- Electrical connection: screw connection
- Shock protection
Series R111/R115
with additional terminal cover
NEW for Series R12x, R311/R315
Incorporated shock protection
LED status display

Application

- Contactless and wear-free switching of AC and 3-phase loads up to 0.5 power factor.

	UL	CSA
	cUL ¹⁾	
x	x	
x	x	
x	x	
x	x	
x	x	
x	x	

Semi-conductor 3-phase contactor HDS Semi-conductor 3-phase reversing contactor HDWS


General features

- Load side:
HDS R2: Triacs für AC 1 / AC 3 up to 460VAC and 3.4 A with internal overvoltage protection
HDS-50: Alternistors for AC 1 / AC 3 up to 530VAC and 50A, with internal RC-circuit and overvoltage protection
- Electrical isolation by means of optocoupler between control circuit and load circuit
- Switch-position indication by LED
- Control circuit protected against reverse polarity
- Zero voltage switching, radio interference suppressed
- Snap on mounting with adapter for 35 mm top-hat rail to EN DIN 50 022.
- Integrated shock hazard protection
- Electrical connection: screw connection
- **Integrated heat sink, ready-to-use**

Application

- Solid state switching of resistive and inductive AC and 3-phase loads

¹⁾ pending

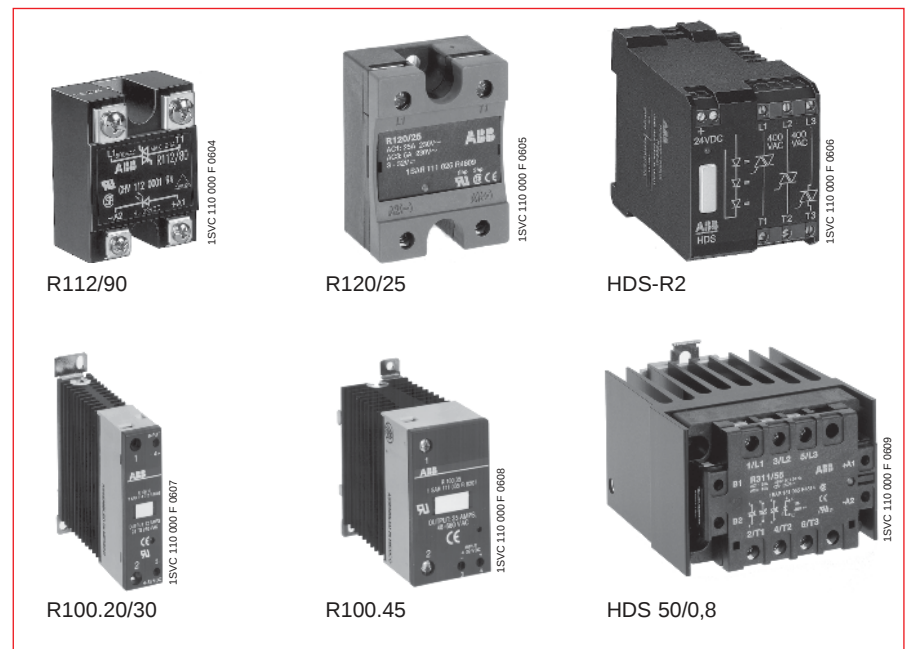

SIGMASWITCH® solid state relays

Ordering details




R 111/25



R 120/50



R 126/25



R 311/25

Solid state relays - standard version

- Convenient
- Space-saving
- Standard enclosure

Type	Rated control circuit voltage U_c	Rated operating voltage U_e	Rated current I_e AC1	Order code	Pack. unit piece	Price 1 piece	Weight 1 piece kg/lb
------	--	----------------------------------	----------------------------	------------	------------------	---------------	----------------------

Standard version, single-phase, load voltage: 24-280VAC

R111/25	3-32VDC	24-280VAC	25A	1SAR 111 025 R 0102	1		0.110/0.24
R111/45	3-32VDC	24-280VAC	50A	1SAR 111 050 R 0102	1		0.110/0.24
R115/25	90-280VAC/DC	24-280VAC	25A	1SAR 111 025 R 0302	1		0.110/0.24
R115/45	90-280VAC/DC	24-280VAC	50A	1SAR 111 050 R 0302	1		0.110/0.24

Standard version, single-phase, load voltage: 42-530VAC

R111/20	3-32VDC	42-530VAC	25A	1SAR 111 025 R 0106	1		0.110/0.24
R111/40	3-32VDC	42-530VAC	50A	1SAR 111 050 R 0106	1		0.110/0.24
R111/90	3-32VDC	42-530VAC	90A	1SAR 111 090 R 0106	1		0.140/0.28
R115/20	90-280VAC/DC	42-530VAC	25A	1SAR 111 025 R 0306	1		0.110/0.24
R115/40	90-280VAC/DC	42-530VAC	50A	1SAR 111 050 R 0306	1		0.110/0.24
R115/90	90-280VAC/DC	42-530VAC	90A	1SAR 111 090 R 0306	1		0.140/0.28

Standard version, single-phase, load voltage: 24-690VAC

R112/50	4.5-32VDC	24-690VAC	50A	1SAR 111 050 R 0608	1		0.110/0.24
R112/90	4.5-32VDC	24-690VAC	90A	1SAR 111 090 R 0608	1		0.140/0.28
R112/110	4.5-32VDC	24-690VAC	110A	1SAR 111 110 R 0608	1		0.140/0.28

Solid state relays - touch proof, compact version

- Incorporated shock protection (no additional terminal cover necessary)
- LED status display
- Save foot print as in the standard series (easy interchangeability)

Compact version, single-phase, load voltage: 24-265VAC

R120/25	3-32VDC	24-265VAC	25A	1SAR 111 025 R 4609	1		0.060/0.13
R120/50	3-32VDC	24-265VAC	50A	1SAR 111 050 R 4609	1		0.060/0.13

Compact version, single-phase, load voltage: 42-530VAC

R121/25	4-32VDC	42-530VAC	25A	1SAR 111 025 R 4606	1		0.060/0.13
R121/50	4-32VDC	42-530VAC	50A	1SAR 111 050 R 4606	1		0.060/0.13
R121/75	4-32VDC	42-530VAC	75A	1SAR 111 075 R 4606	1		0.100/0.22
R121/100	4-32VDC	42-530VAC	100A	1SAR 111 100 R 4606	1		0.100/0.22
R126/25	24-265VAC/24-48VDC	42-530VAC	25A	1SAR 111 025 R 4707	1		0.060/0.13
R126/50	24-265VAC/24-48VDC	42-530VAC	50A	1SAR 111 050 R 4707	1		0.060/0.13
R126/75	24-265VAC/24-48VDC	42-530VAC	75A	1SAR 111 075 R 4707	1		0.100/0.22
R126/100	24-265VAC/24-48VDC	42-530VAC	100A	1SAR 111 100 R 4707	1		0.100/0.22

Compact version, single-phase, load voltage: 42-660VAC

R122/50	4-32VDC	42-660VAC	50A	1SAR 111 050 R 4607	1		0.060/0.13
R122/75	4-32VDC	42-660VAC	75A	1SAR 111 075 R 4607	1		0.100/0.22
R122/100	4-32VDC	42-660VAC	100A	1SAR 111 100 R 4607	1		0.100/0.22

Compact version, three-phase, load voltage: 12-530VAC

R311/25	10-40VDC	12-530VAC	25A	1SAR 131 025 R 4814	1		0.380/0.84
R311/55	10-40VDC	12-530VAC	55A	1SAR 131 055 R 4814	1		0.380/0.84
R315/55	20-265VAC/DC	12-530VAC	55A	1SAR 131 055 R 4914	1		0.380/0.84

Notes

Solid-state relays

