

Water Treatment



HYDRA BX

ELECTROMAGNETIC DOSING PUMPS



Main characteristics

- Analogue electromagnetic dosing pump with constant dosing, manually adjustable by a control knob on the front panel. Power-on led indicator
- PVDF-C pump head
- Double ceramic balls
- Pure PTFE diaphragm for full compatibility with all chemicals
- Flow rate manual adjustment between 0÷100%
- Manual priming valve
- Wall mounting with fixing bracket
- Anti-seepage system

Water Treatment

Performance data

PERFORMANCES TEST HAS BEEN DONE AT AMBIENT TEMPERATURE, WITH WATER, AT 1,5 mt SUCTION HEIGHT


FLOW RATE	PRESSURES	CC/IMP.	CONNECTIONS	STROKES/MIN.	DIMENSIONS	PROTECTION	WEIGHT	ABSORPTION	POWER
5 l/h	8 bar	0.52	4x6	160	190,5 x 92 x 135,5	IP65	1,5 Kg	12 W	230 Vac
3 l/h	10 bar	0.31	4x6	160	190,5 x 92 x 135,5	IP65	1,5 Kg	12 W	230 Vac

Anti-seepage system

The anti-seepage system, is a solution to prevent the intrusion of chemical product inside the pump: leakage and chemical intrusion can happen when the O-ring is damaged or consumed by regular use.

This device is integrated in the hydraulic part, between pump head and body, behind the diaphragm: the outgoing collection channel of the anti-seepage device (see below blue arrow) collects the leakage and expel it out.

When the leakage is visible, the operator can proceed either tightening the 4 bolts of the head (4Nm torque) or disassembling the head and inspect it in order to understand leakage causes .

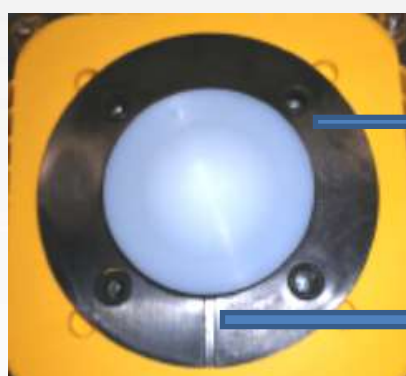

Anti-seepage device

collection channel

Water Treatment




Main applications

- Electroplating industry, Pickling, Degreasing and metal treatments.
- Cooling Tower
- Potable water application
- Reverse osmosis application
- Paper industry
- Ceramic industry

Installation Kit (included)

- A. Opaque hose for connecting the pump's outlet to the injection point
- B. Transparent hose for suction and for connecting the bleeding valve up for manual priming
- C. Injection fitting
- D. Hose connection kit
- E. Bottom filter
- F. Wall mounting bracket
- G. Anchors for securing the pump to the wall
- H. Screw protection caps
- I. Instructions Manual

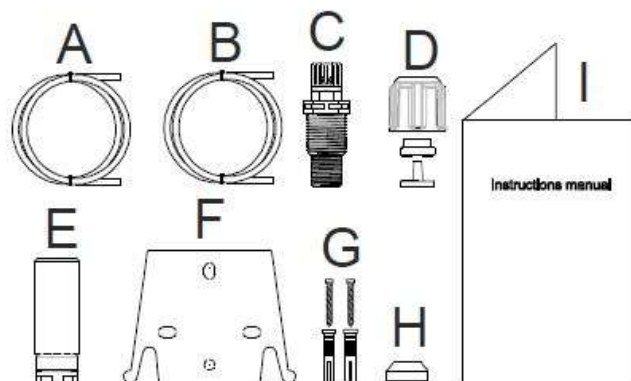

Water Treatment



Accessories

AC.VIE



- Extractable injection valve PVC ½" g.m. IN - ½" g.m. OUT



- Extractable injection valve with ball valve PVC ½" g.m. IN - ½" g.m. OUT

AC.ST



- Horizontal base mounting bracket

AC.VS



- Back-pressure valve up to 10 bar
- PTFE diaphragm

PRIMING AID



- Capacity: 300 ml
- PVC body
- FPM seals
- Connections: 4x6mm – 8x12mm


AC.VM PVDF



- Multifunction valve, antisiphon, backpressure, safety
- PVDF body, PTFE membrane
- Adjustable Pressure 0÷5 bar • Relief Pressure 0÷18 bar

bar	l/h
12	1,5
10	3,0
9	3,8
8	5,0
6	6,0
4	6,5
2	6,8


HYDRA Curve - Flow (l/h) x Pressure (bar)

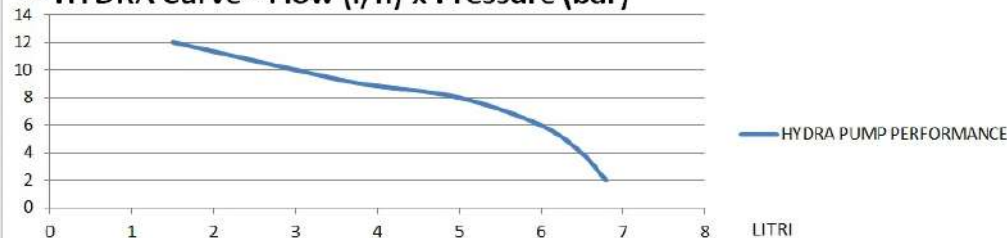


Water Treatment



Dimensional drawings

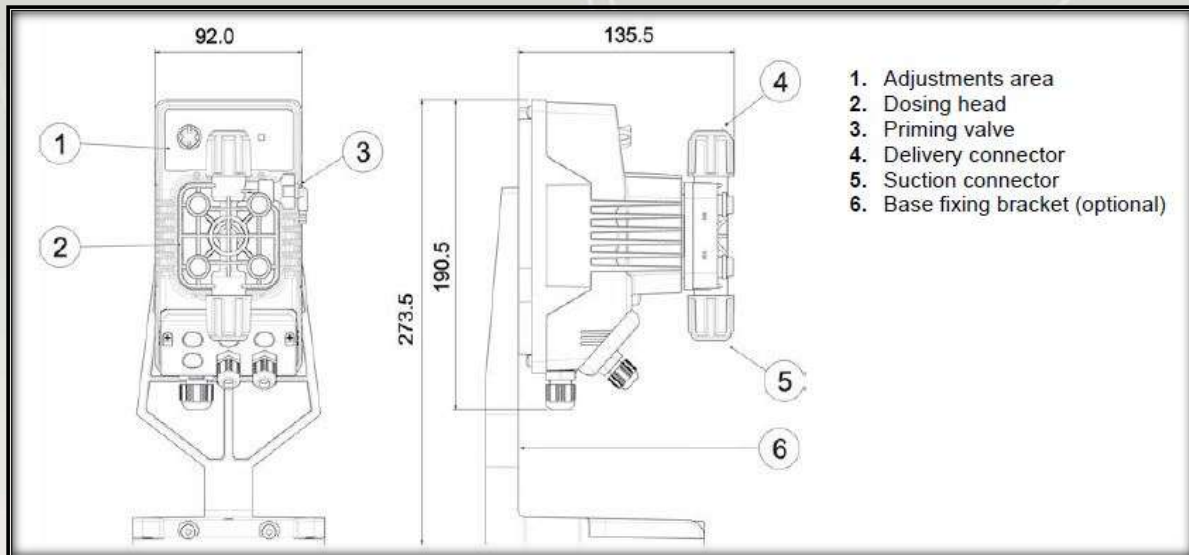

Fixing templates

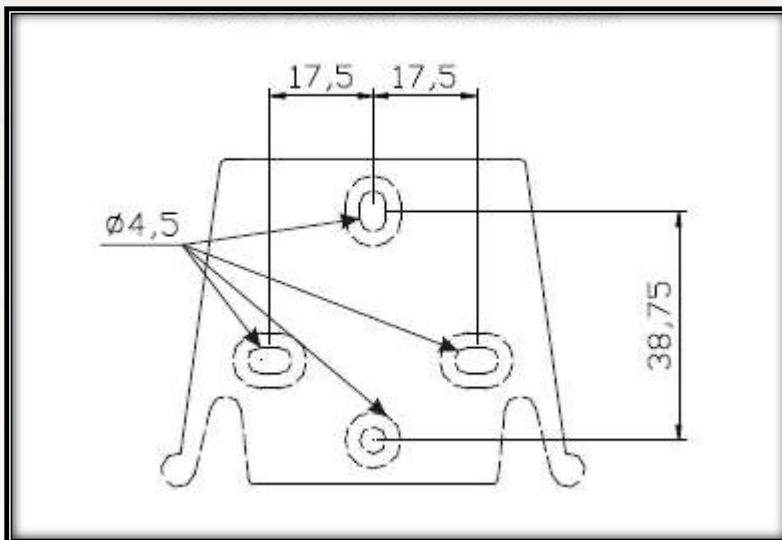

Plumbing

